


Important


This Technical Data Sheet and the corresponding Installation Instructions provide important information to ensure the installed engine will operate according to the design specification in the Volvo Penta application for certification.

Requirements marked with  are considered as critical for exhaust emissions compliance according to the design specification in the Volvo Penta application for certification.

Failing to follow and meet these instructions and requirements when installing a certified engine in a piece of nonroad equipment for use in the United States violates U.S. federal law (40 CFR 1068.105(b)), subject to fines or other penalties as described in the Clean Air Act.

In-line four stroke diesel engine with common rail direct injection. Rotation direction counterclockwise viewed towards flywheel.

Peak Power		kW	265
		hp	361
		rpm	2100
Peak Torque		Nm	1795
		rpm	1400
Dimensions	L	mm	1400
	W	mm	921
	H	mm	1147

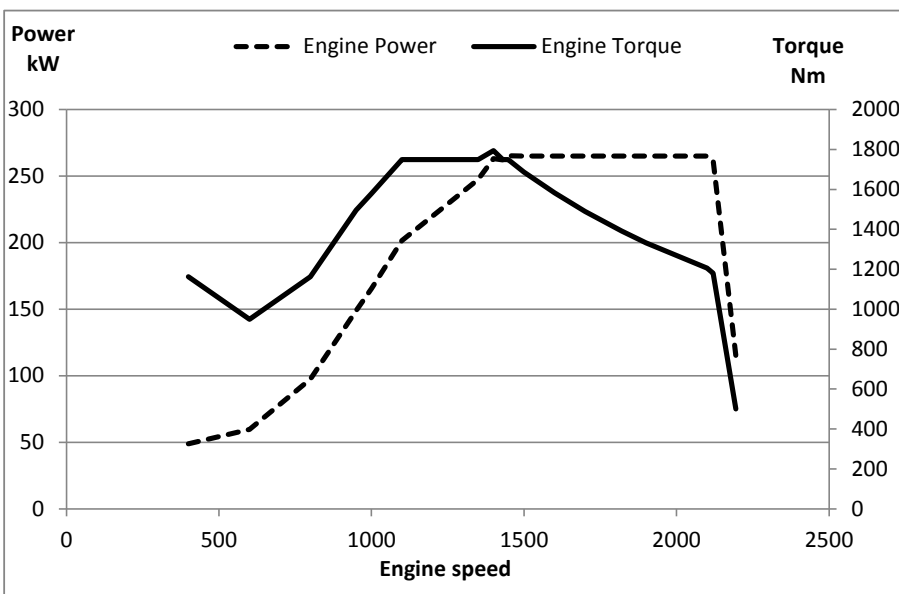

Consumption data

		rpm	1400	1700	2000	2100
Specific fuel consumption at:	25%	g/kWh	223	245	274	289
		lb/hph	0,36	0,40	0,44	0,47
	50%	g/kWh	200	211	229	240
		lb/hph	0,32	0,34	0,37	0,39
	75%	g/kWh	196	202	216	223
		lb/hph	0,32	0,33	0,35	0,36
	100%	g/kWh	196	202	214	218
		lb/hph	0,32	0,33	0,35	0,35
Specific AdBlue®/DEF consumption of diesel consumption, NRTC		Vol%	5,50%			

CO₂ emission declaration

Carbon dioxide (CO ₂) emissions determined during the EU type approval process and recorded in EU type approval certificate, NRTC.	g/kWh	727
--	-------	-----

General

Number of cylinders			6
Displacement, total		liters in ³	10,84 661
Firing order			1-5-3-6-2-4
Bore		mm in	123 4,84
Stroke		mm in	152 5,98
Compression ratio			16.9:1
Wet weight	Engine only	kg lb	1109 2445
	<u>The weight includes:</u> The engine is weighed with components that consist of the minimum running weight including standard flywheel and excluding cooling package, hoses and air filters. For a clearer description, contact your regional application engineer.		
	Power pack	kg lb	N/A N/A
	<u>The weight includes:</u> N/A		
	Exhaust aftertreatment muffler DPF	kg lb	32 71
Exhaust aftertreatment muffler SCR	kg lb	41 90	

Performance

Rated power	kW	265
	rpm	2100
IFN Power	kW	265
ICFN Power	kW	235

The engine performance corresponds to ISO 3046.

For ICFN please see Technical data for TAD1180VE

		rpm	1400	1700	2000	2100
Power	without fan	kW	263	265	265	265
		hp	358	361	360	360
For performance with fan see options technical data for the desired module.						
Torque (IFN)	without fan	Nm	1795	1489	1265	1205
		lbf ft	1324	1098	933	889
Max torque at engine speed	1400 rpm	Nm	1795			
		lbf ft	1324			
Power tolerance		%	±3%			
Total mass moment of inertia, J (mR ²) for two mass calculations (not including flywheel)		kgm ²	0,914			
		lbft ²	21,7			
Total mass moment of inertia, J (mR ²) for transient load response calculations (not including flywheel)		kgm ²	0,914			
		lbft ²	21,7			
Friction Power warm engine		kW	22	33	46	53
		hp	31	45	62	72

Engine brake performance option

		rpm	1200	1500	1900	2200
Brake power:	without fan	kW	109	150	187	208
		hp	149	204	254	283
Brake torque:	without fan	Nm	870	955	937	904
		lbf ft	642	704	691	666
Engine speed range for engine brake activation:		rpm	900			
Engine brake automatically deactivates at:		rpm	800			
Min oil temperature for engine brake activation:		°C	55			

Cold start performance

Cold start limit temperature	Preheater required @	°C	-25
	Preheater 3 kW	°F	-13
	Preheater + block heater req @	°C	-35
	Blockheater: TYP M8T 598 1200W / ~230V	°F	-31
Cold start oil specification	T>-20°C VDS4.5 10W/30 T<-20°C VDS4.5 5W/30		
Cold start fuel specification	EN590 98/70/EC (For details see Volvo Penta Industrial fuel bulletin.)		

Lubrication system

Lubricating oil consumption of diesel consumption (average)		Vol %	0,05
Oil change intervals/specifications	VDS4.5	h	1000
		h	12
Oil pressure at 1700 rpm	Max	kPa	600
		psi	87
Oil pressure at 1700 rpm	Min	kPa	250
		psi	36
Lubrication oil temperature in oil pan:	Max	°C	130
		°F	266
Oil filter filtration efficiency (in accordance with ISO 4548-12)	90%	μ	38
	50%	μ	14






For oil system capacity and angularity limits see technical data per options

Fuel system

Suction line fuel flow at maximum output (Measured at fuel inlet connection)	liter/h	130
	US gal/h	34,3
Fuel supply line min pressure, during engine running (measured at fuel inlet connection @ engine max power curve)	kPa	-20
	psi	-2,90
Fuel supply line max. pressure, during engine stand still (measured at fuel inlet connection @ with full tank)	kPa	17
	psi	2,47
Fuel supply line min. pressure, during engine stand still (measured at fuel inlet connection @ with low tank fill)	kPa	-12
	psi	-1,74
Maximum system return flow	liter/h	50
	US gal/h	13,2
Max. allowable inlet fuel temp (Measured at fuel inlet connection)	°C	60
	°F	140
Prefilter / Water separator filtration efficiency		Use Volvo Penta original
Fuel filter filtration efficiency		Use Volvo Penta original
Injector type	F2	
Fuel to conform to	EN590 98/70/EC (For details see Volvo Penta Industrial fuel bulletin.)	




Intake system

	rpm	1400	1700	2000	2100
Air consumption at: (+25°C and 100kPa)	m ³ /min	16,8	20,2	23,0	24,0
	cfm	595	715	813	848
 See front page for important information	kPa	6			
Max allowable air intake restriction including piping	psi	0,9			

Exhaust system	rpm	1400	1700	2000	2100
Heat rejection to exhaust:	kW	195	209	229	240
	BTU/min	11078	11866	13047	13652
Exhaust gas temperature after turbine at:	°C	516	469	456	458
	°F	961	876	854	856
 See front page for important information					
Max allowable back pressure in exhaust line (after turbine)	kPa	41	46	49	51
	psi	5,9	6,7	7,1	7,4
 See front page for important information					
Max allowable temperature drop between turbine and muffler 1 inlet at exhaust temperature 486° C and exhaust gas flow 0.47 kg/s.	Δ°C	9			
	Δ°F	16,2			
 See front page for important information					
Max allowable temperature drop between muffler 1 and muffler 2 at exhaust temperature 486° C and exhaust gas flow 0.47 kg/s.	Δ°C	4			
	Δ°F	7,2			
Muffler 1 pressure drop (at exhaust gas flow and exhaust temp specified in this table)	kPa	18	20	22	23
	psi	2,6	2,9	3,2	3,3
Muffler 2 pressure drop (at exhaust gas flow and exhaust temp specified in this table)	kPa	17	19	21	21
	psi	2,5	2,8	3,0	3,0
Exhaust gas flow at: (temp and pressure after turbine at the corresponding power setting)	m³/min	36,8	39,3	41,8	43,0
	cfm	1300	1389	1475	1519
 See front page for important information					
Engine speed during stand still regeneration	rpm	1400 ± 100			
 See front page for important information					
Max allowed load during stand still regeneration	Nm	700			
	lb ft	516			

Cooling system		rpm	1400	1800	2000	2100
Heat rejection radiation from engine at:		kW	5,9	7,7	8,0	7,9
		BTU/min	335	438	455	451
Heat rejection to coolant at:		kW	114	124	137	143
		BTU/min	6483	7052	7791	8132
Coolant		Volvo Penta Coolant VCS (Yellow) Ready Mix 40/60 or Mix 40% Volvo Penta Coolant VCS (Yellow) + 60% tap Water*. * Tap water must fulfill Volvo quality standard VOLVO STD: 1285, 1				
Coolant capacity:	Engine only	liter	17			
<i>For coolant capacity for engine and cooling packages see Technical data for the specific option.</i>		US gal	4,5			
Coolant pump	(Engine is reference =1)	drive/ratio	belt/1.41:1 cw			
Coolant pump curve see graphs at end						
Nominal engine coolant pressure before engine circuit coolant pump		kPa	62	61	61	64
		psi	8,9	8,8	8,9	9,3
Coolant pressure drop over complete engine circuit (at coolant flow below)		kPa	32	54	63	69
		psi	4,6	7,8	9,1	10,0
Coolant flow		l/s	4,77	6,18	6,87	7,22
		US gal/s	1,259	1,6	1,814	1,906
Minimum coolant flow At fully opened thermostat		l/s	3,00	3,83	4,25	4,50
		US gal/s	0,793	1,013	1,123	1,189
Maximum outer circuit restriction incl. piping		kPa	55			
		psi	8,0			
Thermostat:	start to open	°C	82			
		°F	180			
	fully open	°C	92			
		°F	197,6			
Maximum static pressure head (expansion tank height + pressure cap setting)		kPa	100			
		psi	14,5			
Minimum static pressure head (expansion tank height + pressure cap setting)		kPa	70			
		psi	10,2			
Maximum top tank temperature		°C	107			
		°F	224,6			
Recommended Draw down capacity. The difference between min coolant level in the expansion tank and the lowest level where the engine's coolant system still functioning		liter	2,00			
		US gal	0,528			

Charge air cooler system

		rpm	1400	1700	2000	2100
Heat rejection to charge air cooler		kW	39	47	55	58
		BTU/min	2200	2650	3106	3277
Charge air mass flow		kg/s	0,33	0,39	0,44	0,46
Charge air inlet temp @ 25 °C (Charge air temp after turbo compressor)		°C	155	159	166	169
		°F	312	318	331	336
 See front page for important information Max allowable Charge air outlet temp @ 25 °C ambient temperature (Charge air temp after charge air cooler)	EGR valve closed*	°C	50			
		°F	122			
 See front page for important information Max allowable Charge air outlet temp @ 25 °C ambient temperature (Charge air temp after charge air cooler)	EGR valve open*	°C	100			
		°F	212			
*During certain operating conditions - temperature in inlet manifold is temporarily elevated intentionally using exhaust gas. This is normal. External cooling control should not counter this but instead control inlet manifold temperature only to avoid exceeding 100 C. This operating condition can be observed on CAN: EngExGasRec1ValvePos_BB1_X_E > 50%. More information available in EATS installation manual available from your local Penta representative.						
 See front page for important information Maximum pressure drop over charge air cooler incl. piping		kPa	12	12	12	12
		psi	1,7	1,7	1,7	1,7
Charge air pressure - relative pressure at sea level (After charge air cooler)		kPa	163	166	166	165
		psi	23,6	24,1	24,0	23,9

Electrical system

Engine Management System		EMS2.4				
Voltage and type		24				
Battery and cable resistance Recommendations:	Temperature	°C		25	0	-15
		°F		77	32	5
	Maximum main circuit resistance @ 20°C	mΩ		5	4	3
	Minimum battery size	Ah (20h) / CCA (EN)		140/800	140/800	140/800

Power take off

Maximum allowed torque at individual PTO's. If more than one PTO output is used simultaneously, calculations need to be performed to determine available maximum. Available torque depends on application inertia.

Front end in line with crankshaft

	rpm	1400	1800	2000	2100
With a total added mass moment of inertia	J (mR2)	≤ 0.05kgm2			
Max torque at continuous load:	Nm	1700	1370	1250	1200
	lbt ft	1254	1010	922	885
PTO at flywheel					
Max allowed bending moment in flywheel housing	Nm	7000			
	lbf ft	5163			
Max load on rear main bearing	N	3000			
	lbf	674			



Engine Protection

Warning implies that a Indication message is sent. Derate means an engine power derate.



Engine sensors				Engine protection action		
	Unit	Warning level (Yellow)	Alarm level (Red)	Default	Max derate, acc engine protection map	Optional (Module or conversion kit)
Fuel temperature ¹	°C	Not installed	Not installed	Not installed	Not installed	Not installed
Oil temperature	°C	125	130	Derate	132	Shut down
Coolant temperature	°C	105	107	Derate	108	Shut down
Charge Air Temperature (Boost temp)	°C	120	125	Derate	126	Shut down
Air filter temperature ¹	°C	Not installed	Not installed	Not installed	Not installed	Not installed
Exhaust gas temperature	°C	535	550	Shut down	550	Shut down
EGR temperature ¹	°C	Not installed	Not installed	Not installed	Not installed	Not installed
ECU temperature	°C	90	N/A	N/A	N/A	N/A
Fuel feed pressure ¹	kPa	Not installed	Not installed	Not installed	Not installed	Not installed
Fuel rail pressure ¹	kPa	Not installed	Not installed	Not installed	Not installed	Not installed
Oil Pressure	kPa	See below	See below	Shut down	See below	Shut down
Δ Piston Cooling Pressure	kPa	N/A	N/A	N/A	N/A	N/A
Δ Charge Air Press (Δ Boost pres)	kPa	See below	See below	Derate	See below	Shut down
Air filter pressure ¹	kPa	Not installed	Not installed	Not installed	Not installed	Not installed
EGR pressure ¹	kPa	Not installed	Not installed	Not installed	Not installed	Not installed
Crankcase pressure increase ¹	kPa	Not installed	Not installed	Not installed	Not installed	Not installed
DPF Differential Pressure	kPa	31	33	Derate	34	Shut down
Oil level ¹	Digital Switch	Not installed	Not installed	Not installed	Not installed	Not installed
Coolant level	Digital Switch	N/A	Low Level	Derate	Low Level	Shut down
DEF Injector Status	Digital Switch	N/A	Error Flag	Derate	Error Flag	Shut down
EATS System - Soot Regen Status	Status Flag	Warning	Stop Request	Derate	Stop Request	Shut down
Water in fuel ¹	Digital Switch	Not installed	Not installed	Not installed	Not installed	Not installed


¹ Sensor not installed for this engine type

Graphs

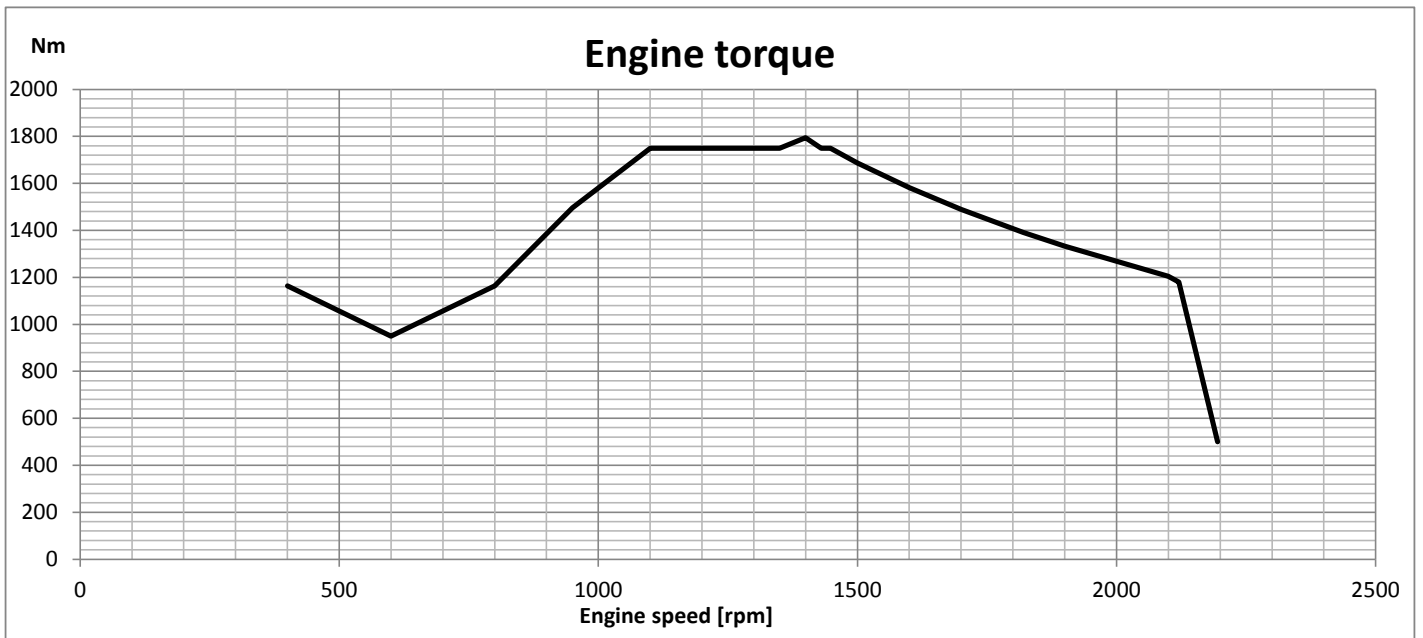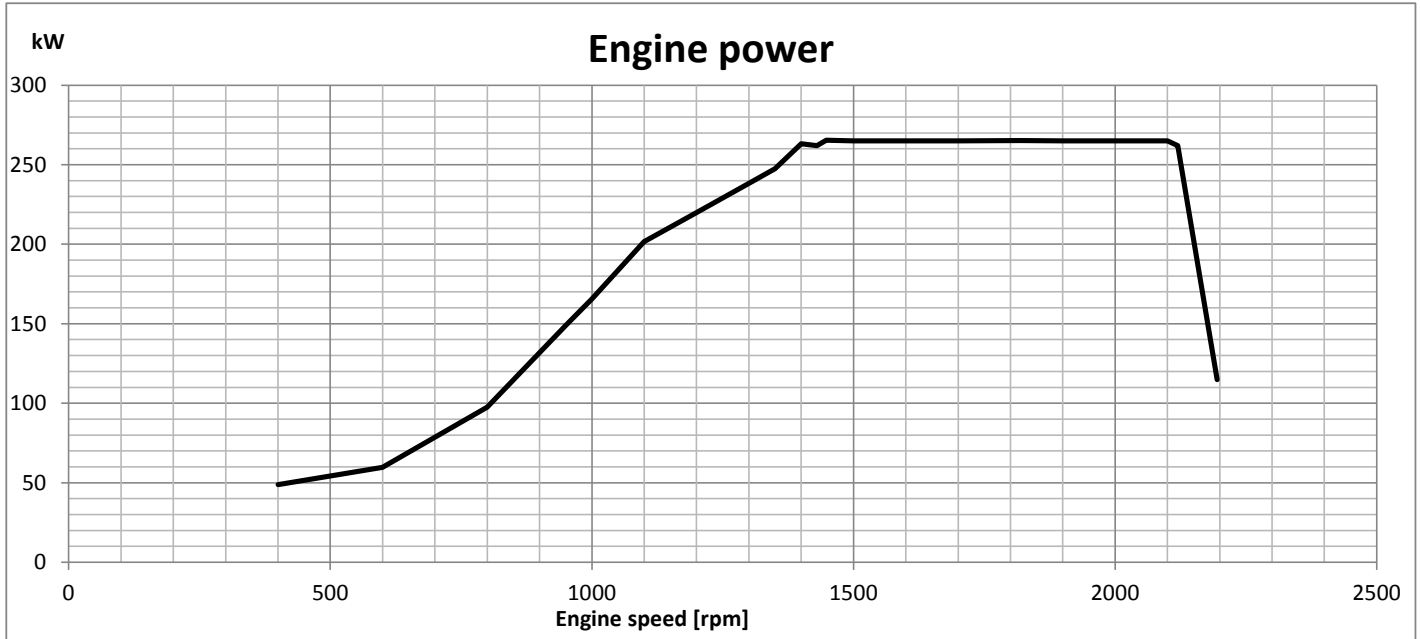

Warning and derate maps

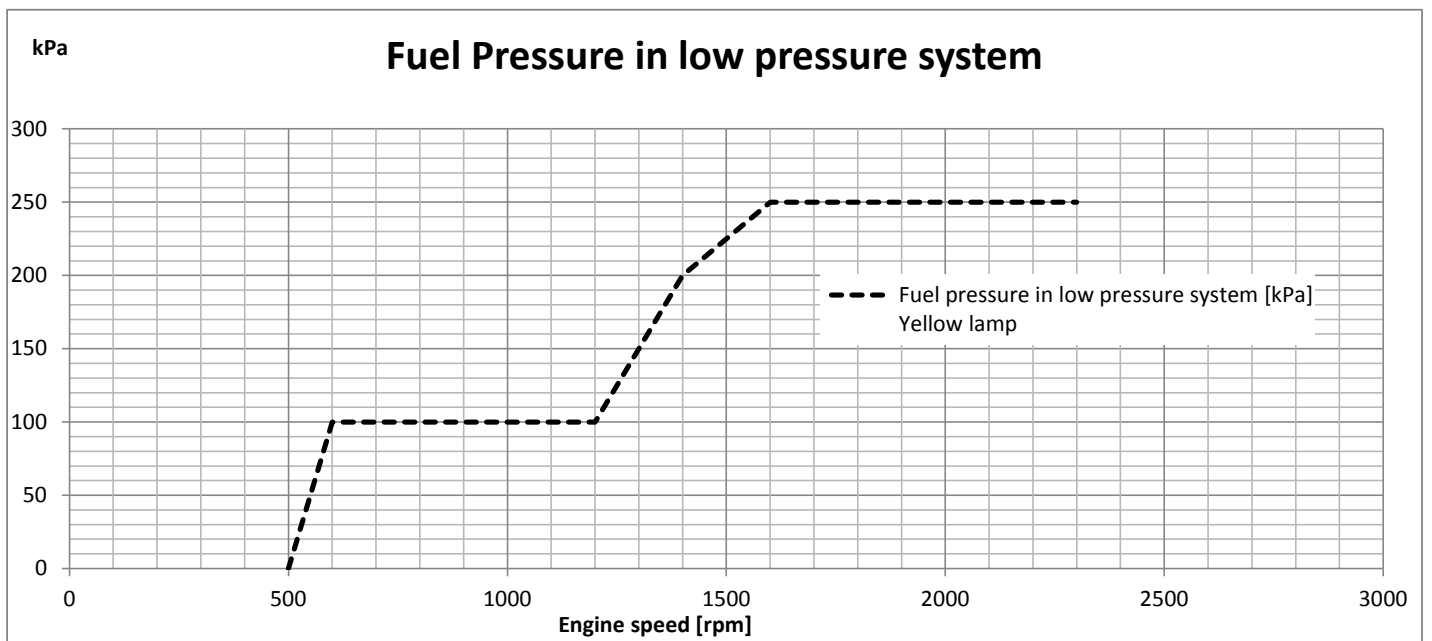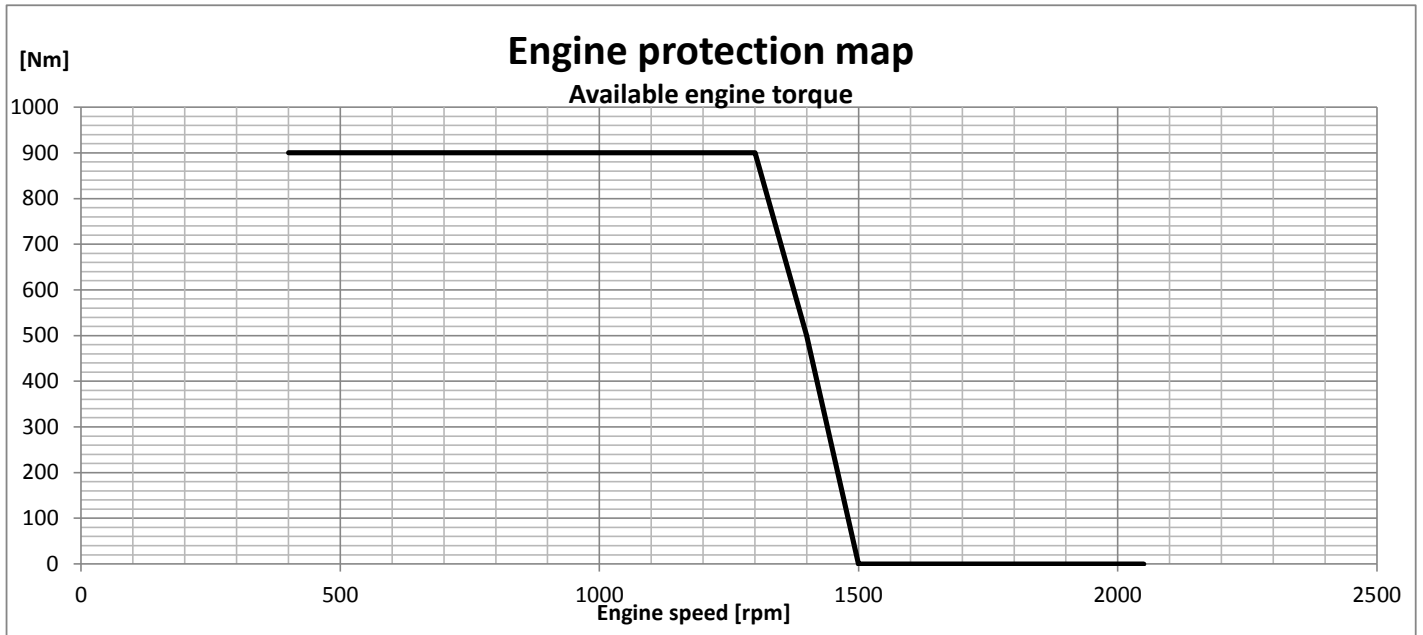

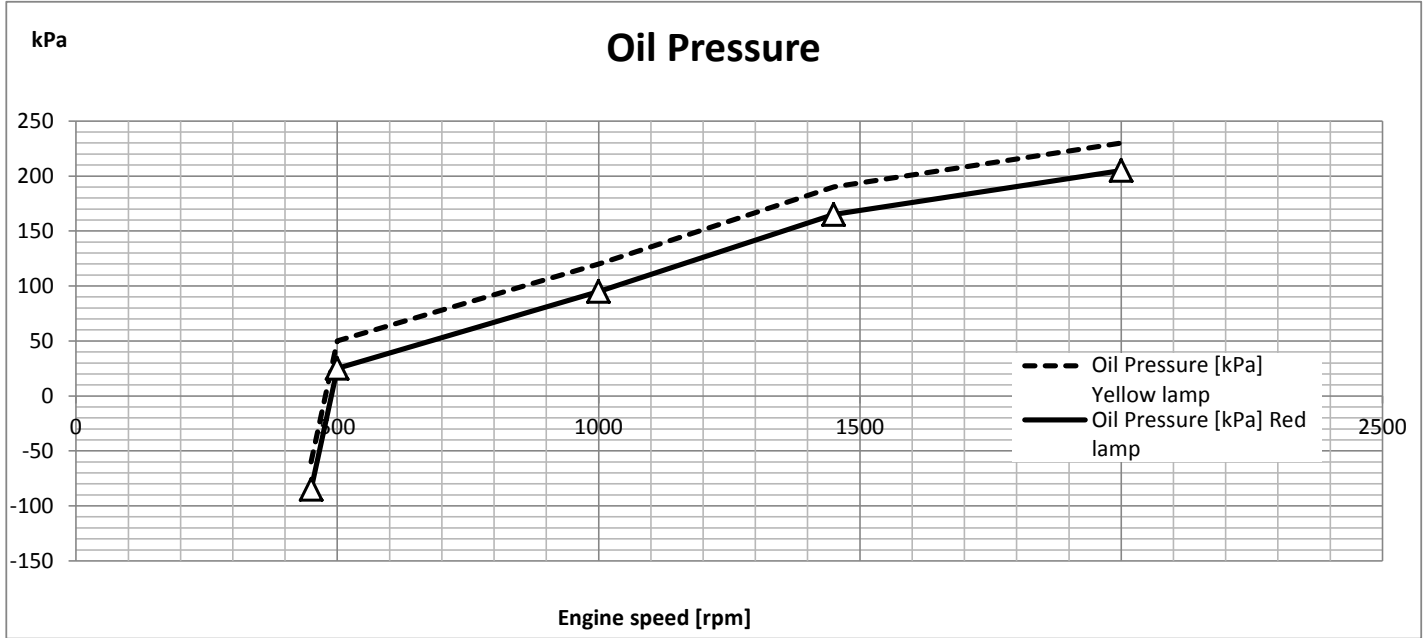

Engine protection for charge air pressure is complex and the trigger levels varies depending on engine mode, altitude and charge air temperature, ambient temperature.
 Below is an example of engine protection limits for charge air pressure for normal operation engine mode, on the sea level with charge air temperature 50 degrees (normal charge cooler CAC efficiency) , and ambient temperature 25 degrees.
 When engine speed increases above 1900 rpm (maximum power) charge pressure demand drops significantly but the actual charge pressure has a physical delay to decrease therefore the fault limit is higher to avoid false alarm.

